Photovoltaic Modules Product Manual

RXS

21Years+

Photovoltaic Manufacturing Experience

Exports to 30+ Countries Around The World

BIPV Technology Leader

1

High Efficiency Solar Module

Mono Bifacial Double Glass Module

DDG(P)530(K)~DDG(P)550(K)

Mono Module DBG530~DBG550

2

Rixin Xihe Smart PV Module

Mono Bifacial Transparent Module With Frame

DDP315(K)~DDP325(K)

Mono All Black Module With Frame

DDP315(K)~DDP325(K)

Mono Bifacial Transparent Frameless Module

DDP315~DDP325

Mono All Black Frameless Module DDP315~DDP325

Poly Module With Frame MDM280(K)~MDM290(K)

Poly Module With Frameless MDM280~MDM290

3

BIPV Solar Module

RXZK-MDN210	RXJJ-MDN210
RXZK-MDM270	RXJJ-MDM270
RXZK-DDN250	RXJJ-DDN250
RXZK-DDM310	RXJJ-DDM310

1

High Efficiency Solar Module

Mono Bifacial Double Glass Module

DDG(P)530(K)~DDG(P)550(K)

Mono Module DBG530~DBG550

日新科技
RIXIN TECHNOLOGY

Mono Bifacial Double Glass Module

DDG(P)530~550(K)

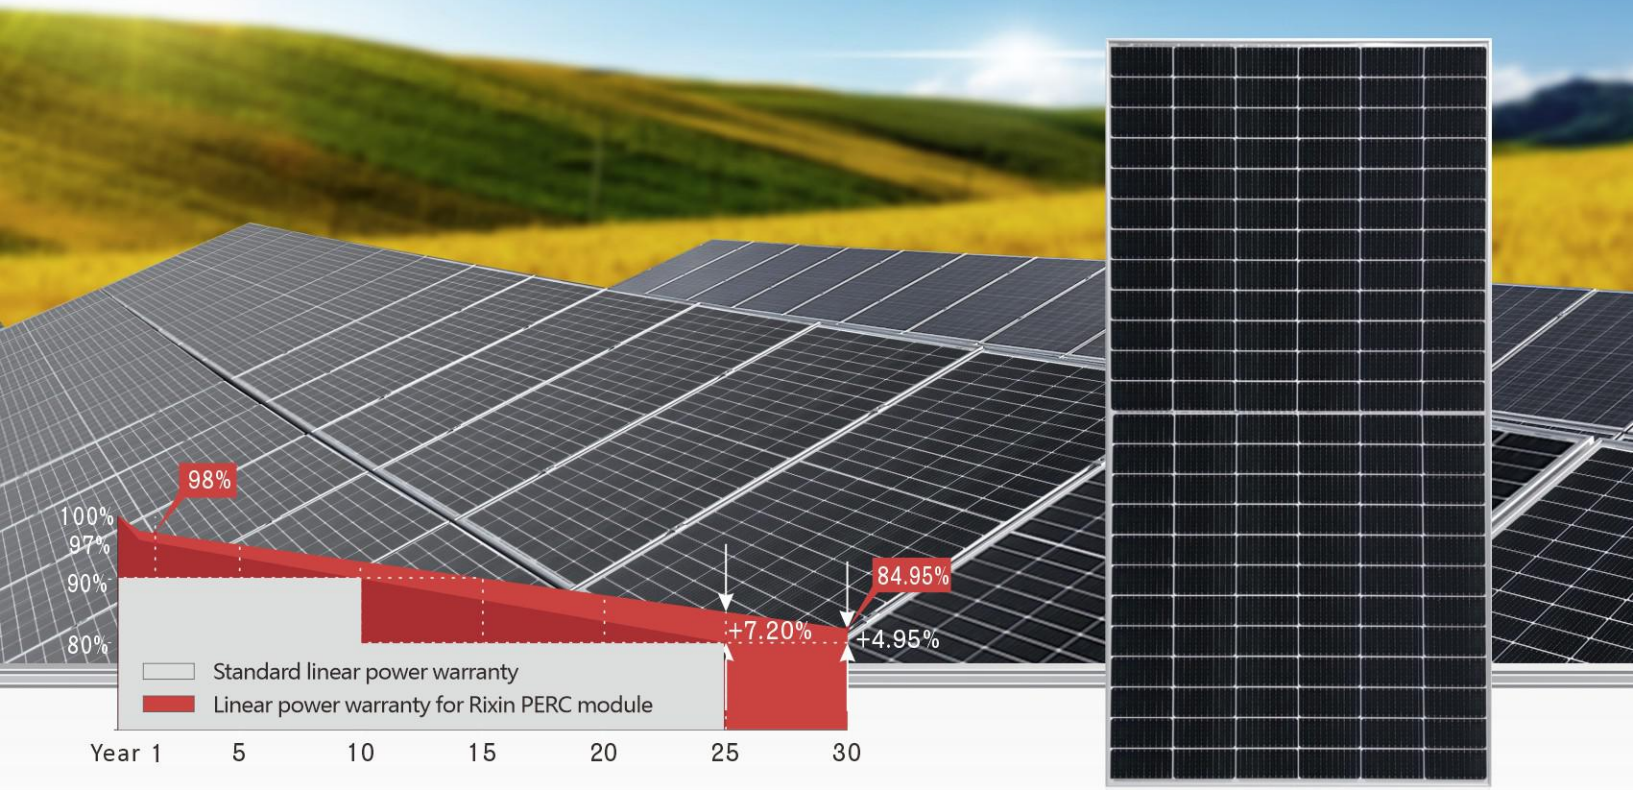

Key Features

High Efficiency

Advanced Ga-doped PERC technology,
High conversion efficiency(up to 21.22%)

Excellent Low-light Performance

Advanced solar cell surface texturing technology, allows for excellent performance in low-light environment

High Reliability

Strict quality control guarantees high reliability

Highly Strengthened Design

Certified to withstand:5400Pa snow load and 2400Pa wind load

Outstanding PID Resistant Performance

Innovative cell technology, keeping module from degradation induced by electric potential difference

Product Certificates

ISO | TÜV | CE

Contact us

+86 27 87801237
info@rixinsolar.com
No.6, Middle Maodianshan Road, Guanshan Avenue, Wuhan, Hubei, China (430079)
www.rixinsolar.com

Mono Bifacial Double Glass Module

DDG(P)530~550(K)

Electrical performance parameters

Model	DDG(P)530(K)	DDG(P)535(K)	DDG(P)540(K)	DDG(P)545(K)	DDG(P)550(K)
Maximum power (Pm/Wp)	530	535	540	545	550
Maximum power voltage (Vmp/V)	41.64	41.87	42.09	42.32	42.54
Maximum power current (Imp/A)	12.73	12.78	12.83	12.88	12.93
Open circuit voltage (Voc/V)	49.65	49.78	49.91	50.12	50.34
Short circuit current (Isc/A)	13.48	13.53	13.58	13.63	13.68
Module efficiency (%)	20.45	20.64	20.83	21.03	21.22

Module dimension (mm)

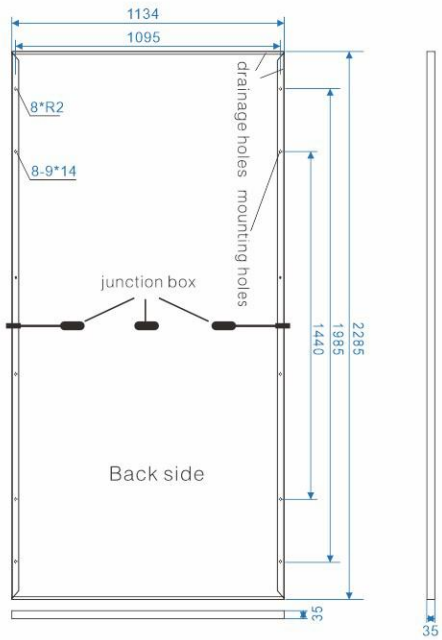



Mechanical performance parameters

Cell Nos & array	Mono half-cut cells144pcs
Cell size (mm)	182*91
Glass thickness (mm)	2.0
Frame	anodized aluminum alloy
Cable	4mm², negative300mm, positive300mm
Module weight(kg)	32.1
Module dimension(L*W*H)(mm)	2285*1134*35mm
Packing	31pcs/pallet

Quality parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	25
NOCT(℃)	45 ± 2
Front/rear static loads(Pa)	2400/5400
Junction box/Connector	Ip68, split/MC4 compatible

Temperature coefficient (STC)

Temperature coefficient of Voc	-0.3%/℃
Temperature coefficient of Isc	+0.06%/℃
Temperature coefficient of Pm	-0.39%/℃

Test condition: irradiance=(1+0.1BiFi)1000W/m2, ambient temperature=25℃, AM=1.5

I-Vcurve

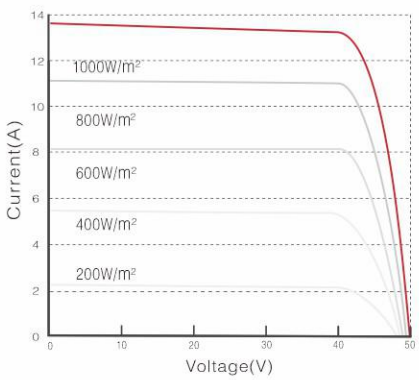

Quality warranty

12-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.
The parameters in this sheet are subject to change without prior notice.

日新科技
RIXIN TECHNOLOGY

Mono Module
DBG530~DBG550

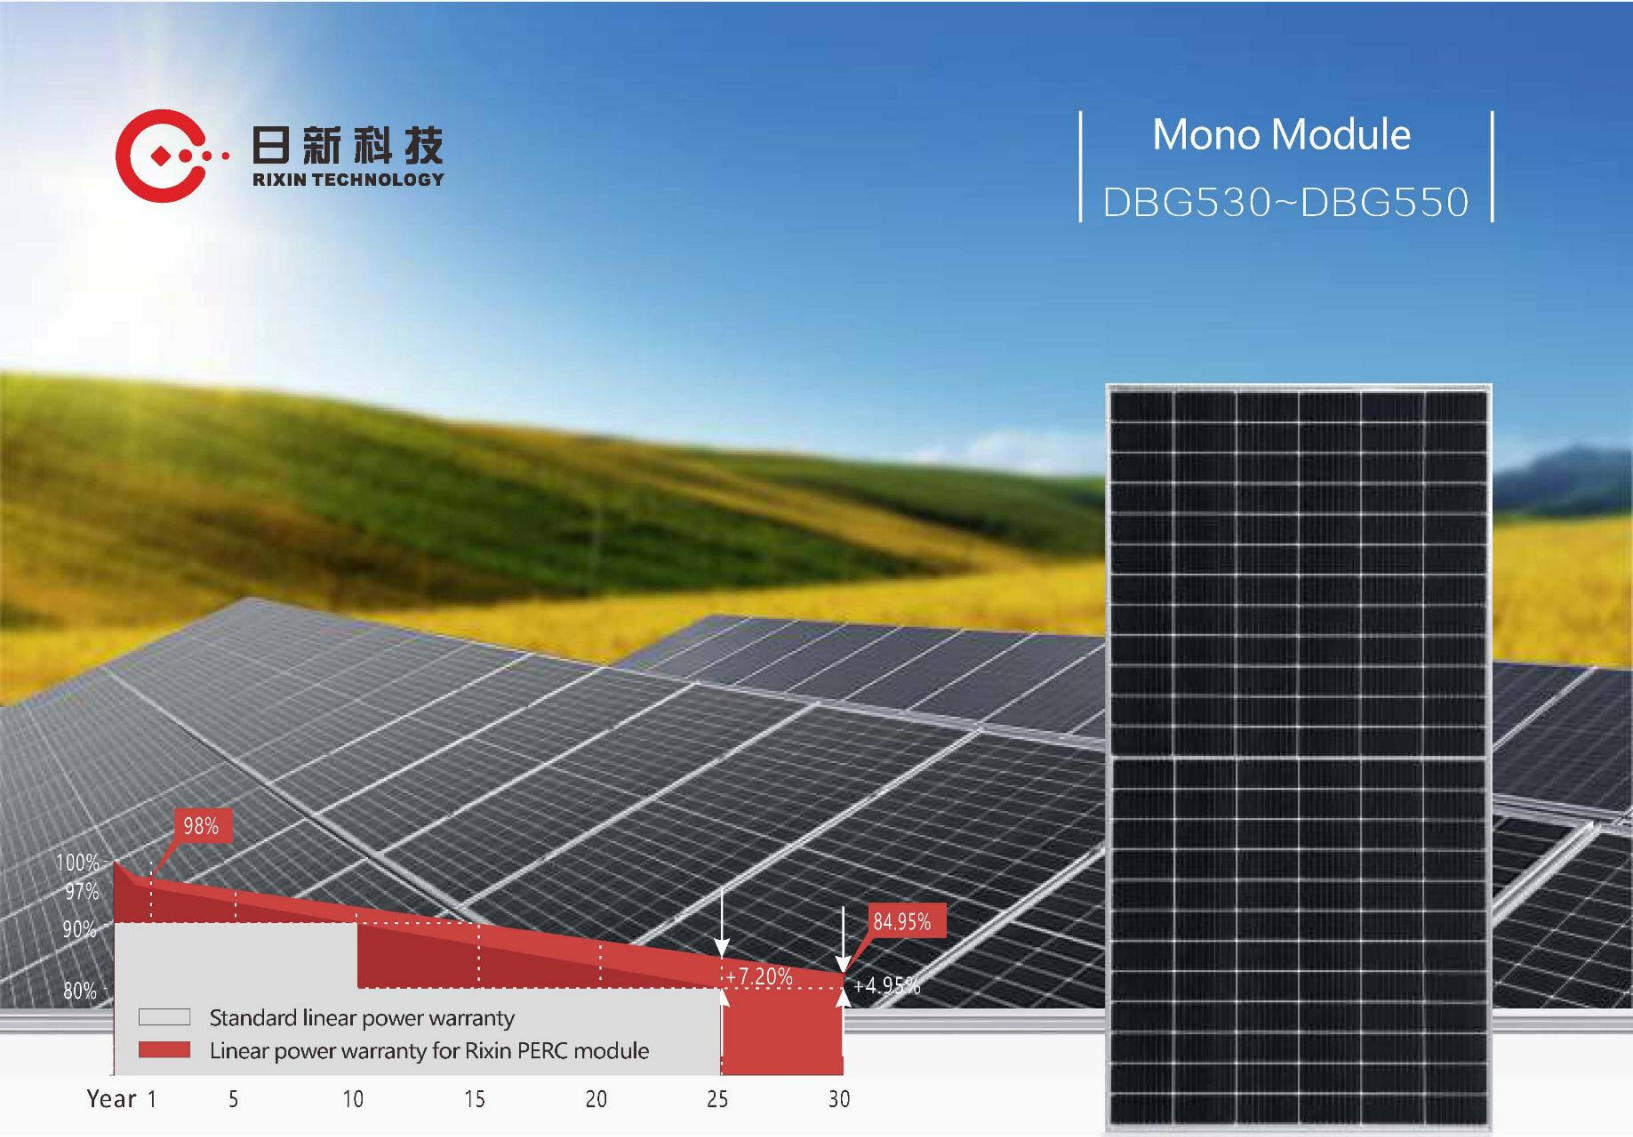

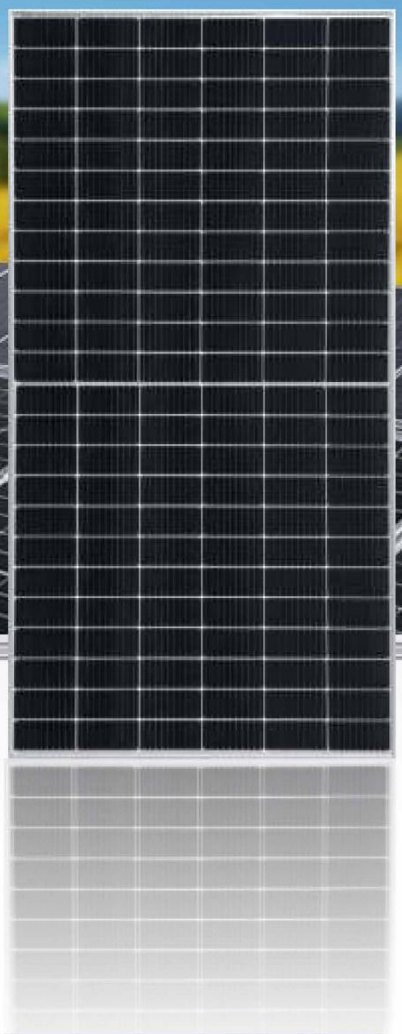

Key Features

High Efficiency
Advanced Ga-doped PERC technology,
High conversion efficiency(up to 21.22%)

Excellent Low-light Performance
Advanced solar cell surface texturing technology, allows for excellent performance in low-light environment

High Reliability
Strict quality control guarantees high reliability

Highly Strengthened Design
Certified to withstand:5400Pa snow load and 2400Pa wind load

Outstanding PID Resistant Performance
Innovative cell technology, keeping module from degradation induced by electric potential difference

Product Certificates

ISO TÜV CE

Contact us

+86 27 87801237
info@rixinsolar.com
No.6, Middle Maodianshan Road, Guanshan Avenue, Wuhan, Hubei, China (430079)
www.rixinsolar.com

Mono Module

DBG530~DBG550

Electrical performance parameters

Model	DBG530	DBG535	DBG540	DBG545	DBG550
Maximum power (Pm/Wp)	530	535	540	545	550
Maximum power voltage (Vmp/V)	41.57	41.80	42.03	42.25	42.48
Maximum power current (Imp/A)	12.75	12.80	12.85	12.90	12.95
Open circuit voltage (Voc/V)	49.63	49.76	49.89	50.10	50.32
Short circuit current (Isc/A)	13.50	13.55	13.60	13.65	13.70
Module efficiency (%)	20.51	20.71	20.90	21.09	21.29

Module dimension (mm)

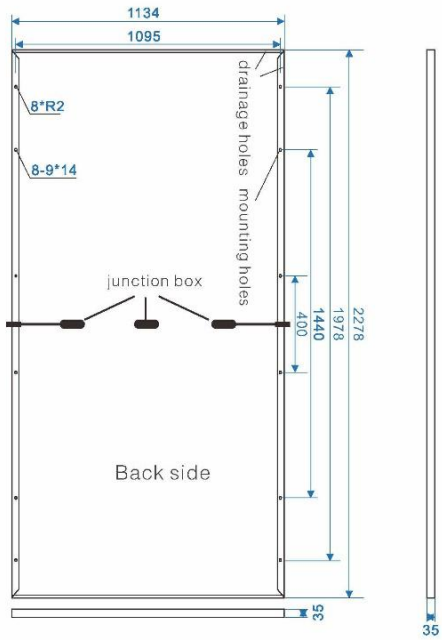

Mechanical performance parameters

Cell Nos & array	Mono half-cut cells144pcs
Cell size (mm)	182*91
Glass thickness (mm)	3.2
Frame	anodized aluminum alloy
Cable	4mm², negative300mm, positive300mm
Module weight(kg)	27
Module dimension(L*W*H)(mm)	2278*1134*35mm
Packing	31pcs/pallet

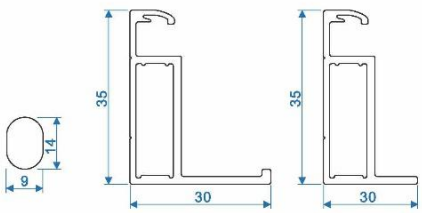

Quality parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+3
Maximum system voltage (V)	DC1500
System maximum protection current (A)	25
NOCT(℃)	45 ± 2
Front/rear static loads(Pa)	2400/5400
Junction box/Connector	Ip68, split/MC4 compatible

Temperature coefficient (STC)

Temperature coefficient of Voc	-0.275%/℃
Temperature coefficient of Isc	+0.05%/℃
Temperature coefficient of Pm	-0.35%/℃

I-Vcurve

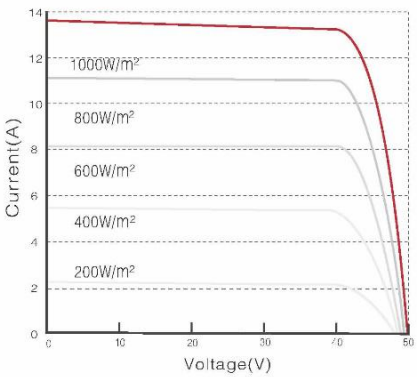

Quality warranty

12-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.
The parameters in this sheet are subject to change without prior notice.

Mono Bifacial Double Glass Module

Application Case

150MW Project in Hubei Xiaochang

106MW Project in Hubei Jinmen

2

Rixin Xihe Smart PV Module

Mono Bifacial Transparent Module With Frame

DDP315(K)~DDP325(K)

Mono All Black Module With Frame

DDP315(K)~DDP325(K)

Mono Bifacial Transparent Frameless Module

DDP315~DDP325

Mono All Black Frameless Module

DDP315~DDP325

Poly Module With Frame MDM280(K)~MDM290(K)

Poly Module With Frameless MDM280~MDM290

日新科技
RIXIN TECHNOLOGY

Xihe Smart PV Module

DDP315~325(K)

Main Features

Building materials design standards

Designed as per green building materials standards
30-Year power output

Half-cut technology

More power generation, more artistic, power gain increased markedly with the back light gain

Intelligent safety guarantee

Module safety shutdown,power optimization and monitoring functions

Reduce shading loss

Half-cut cell + intelligent optimization technology
Avoid the influence of shading, reduce the loss of power

Easy Installation

The module design is easy for installation and could achieve a flat & full installation.

Product Certificates

ISO CE

Contact Us

Sales Hotline:
+86 27 87801237
info@rixinsolar.com

Rixin Technology PV Industrial Park, No.6, Middle Maodianshan Road, East Lake Development Zone, Wuhan, Hubei, China
www.rixinsolar.com

Xihe Smart PV Module

DDP315~325(K)

Launched for
intelligent & green buildings

Electrical performance parameters

Model	DDP315(K)	DDP320(K)	DDP325(K)
Maximum power (Pm/Wp)	315	320	325
Maximum power voltage (Vmp/V)	29.3	29.4	29.5
Maximum power current (Imp/A)	10.75	10.88	11.00
Open circuit voltage (Voc/V)	35.9	36	36.1
Short circuit current (Isc/A)	11.54	11.60	11.66
Module efficiency (%)	18.8	19.1	19.4

Mechanical performance parameters

Cell Nos & array	Mono half-cut cells108 (6*9*2)
Appearance color	Black
Cable	4mm², negative1000mm, positive1000mm
Module weight(kg)	20
Module dimension(L*W*H)(mm)	1606*1042*30mm
Packing	30pcs/pallet
Power optimizer matching form	2 modules equipped with 1 optimizer

Quality parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	20
NOCT(℃)	45 ± 2
Front/rear static loads(Pa)	2400/3600
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature coefficient (STC)

Temperature coefficient of Voc	-0.3%/℃
Temperature coefficient of Isc	+0.06%/℃
Temperature coefficient of Pm	-0.39%/℃

Test condition: irradiance=(1+0.1BiFi)1000W/m2, ambient temperature=25℃, AM=1.5

Quality warranty

10-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.
The parameters in this sheet are subject to change without prior notice.

Module dimension (mm)

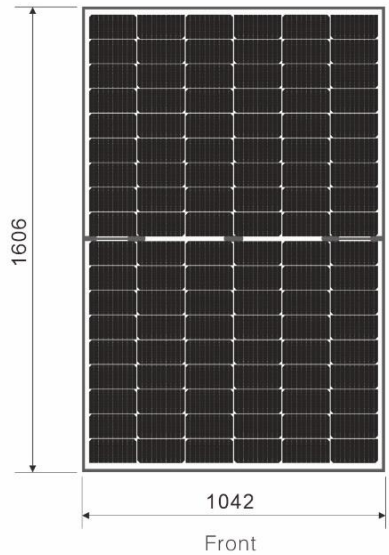

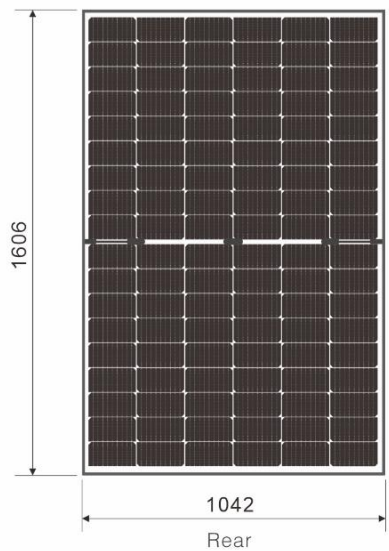

I-V curve(315W)

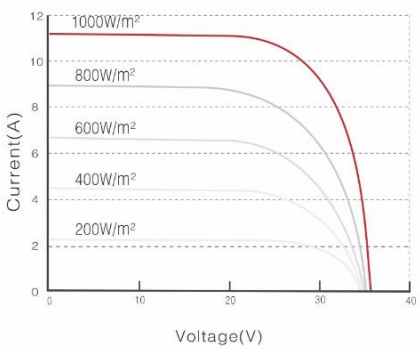

日新科技
RIXIN TECHNOLOGY

Xihe Smart PV Module

DDP315~325(K)

Main Features

Building materials design standards

Designed as per green building materials standards
30-Year power output

Half-cut technology, full black appearance

Simple full black design, excellent cell hidden technology

Intelligent safety guarantee

Module safety shutdown,power optimization and monitoring functions

Reduce shading loss

Half-cut cell + intelligent optimization technology
Avoid the influence of shading, reduce the loss of power

Easy Installation

The module design is easy for installation and could achieve a flat & full installation.

Product Certificates

ISO CE

Contact Us

Sales Hotline:
+86 27 87801237
info@rixinsolar.com

Rixin Technology PV Industrial Park, No.6, Middle Maodianshan Road, East Lake Development Zone, Wuhan, Hubei, China
www.rixinsolar.com

Xihe Smart PV Module

DDP315~325(K)

Launched for
intelligent & green buildings

Electrical performance parameters

Model	DDP315(K)	DDP320(K)	DDP325(K)
Maximum power (Pm/Wp)	315	320	325
Maximum power voltage (Vmp/V)	29.3	29.4	29.5
Maximum power current (Imp/A)	10.75	10.88	11.00
Open circuit voltage (Voc/V)	35.9	36	36.1
Short circuit current (Isc/A)	11.54	11.60	11.66
Module efficiency (%)	18.8	19.1	19.4

Mechanical performance parameters

Cell Nos & array	Mono half-cut cells108 (6*9*2)
Appearance color	Black
Cable	4mm², negative1000mm, positive1000mm
Module weight(kg)	20
Module dimension(L*W*H)(mm)	1606*1042*30mm
Packing	30pcs/pallet
Power optimizer matching form	2 modules equipped with 1 optimizer

Quality parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	20
NOCT(℃)	45 ± 2
Front/rear static loads(Pa)	2400/3600
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature coefficient (STC)

Temperature coefficient of Voc	-0.3%/℃
Temperature coefficient of Isc	+0.06%/℃
Temperature coefficient of Pm	-0.39%/℃

Test condition: irradiance=(1+0.1BiFi)1000W/m2, ambient temperature=25℃, AM=1.5

Quality warranty

10-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.
The parameters in this sheet are subject to change without prior notice.

Module dimension (mm)

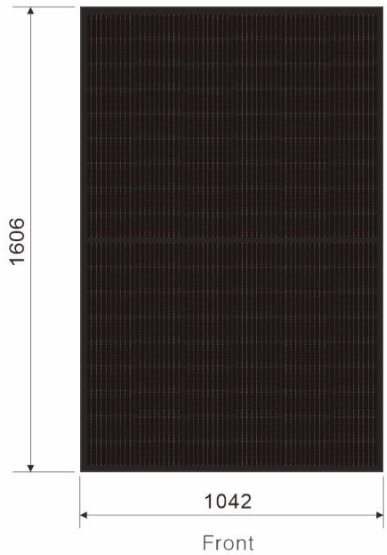

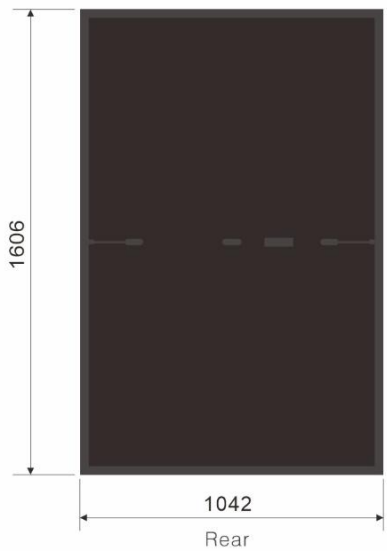

I-V curve(315W)

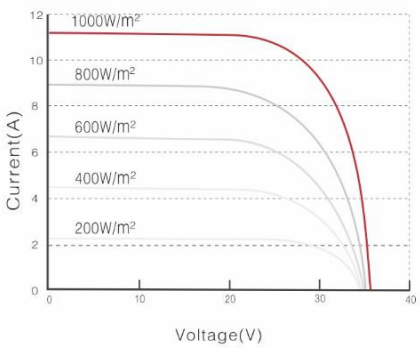

日新科技
RIXIN TECHNOLOGY

Xihe Smart PV Module

DDP315~DDP325

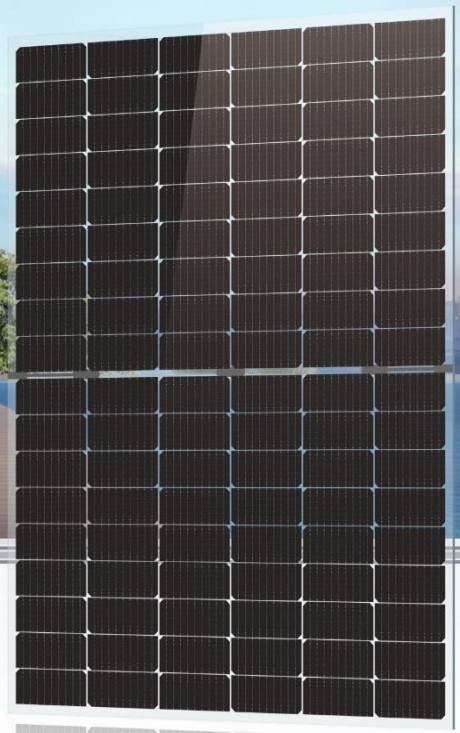

Main Features

Building materials design standards

Designed as per green building materials standards
30-Year power output

Half-cut technology

More power generation, more artistic, power gain increased markedly with the back light gain

Intelligent safety guarantee

Module safety shutdown,power optimization and monitoring functions

Reduce shading loss

Half-cut cell + intelligent optimization technology
Avoid the influence of shading, reduce the loss of power

Easy Installation

The module design is easy for installation and could achieve a flat & full installation.

Product Certificates

ISO CE

Contact Us

Sales Hotline:
+86 27 87801237
info@rixinsolar.com

Rixin Technology PV Industrial Park, No.6, Middle Maodianshan Road, East Lake Development Zone, Wuhan, Hubei, China
www.rixinsolar.com

Xihe Smart PV Module

DDP315~DDP325

Launched for
intelligent & green buildings

Electrical performance parameters

Model	DDP315	DDP320	DDP325
Maximum power (Pm/Wp)	315	320	325
Maximum power voltage (Vmp/V)	29.3	29.4	29.5
Maximum power current (Imp/A)	10.75	10.88	11.00
Open circuit voltage (Voc/V)	35.9	36	36.1
Short circuit current (Isc/A)	11.54	11.60	11.66
Module efficiency (%)	19.0	19.3	19.6

Mechanical performance parameters

Cell Nos & array	Mono half-cut cells 108 (6*9*2)
Appearance color	Black
Cable	4mm², negative1000mm, positive1000mm
Module weight(kg)	19
Module dimension(L*W*H)(mm)	1600*1036*5mm
Packing	33pcs/pallet
Power optimizer matching form	2 modules equipped with 1 optimizer

Quality parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	20
NOCT(℃)	45 ± 2
Front/rear static loads(Pa)	2400/2400
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature coefficient (STC)

Temperature coefficient of Voc	-0.3%/℃
Temperature coefficient of Isc	+0.06%/℃
Temperature coefficient of Pm	-0.39%/℃

Test condition: irradiance=(1+0.1BiFi)1000W/m2, ambient temperature=25℃, AM=1.5

Quality warranty

10-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.
The parameters in this sheet are subject to change without prior notice.

Module dimension (mm)

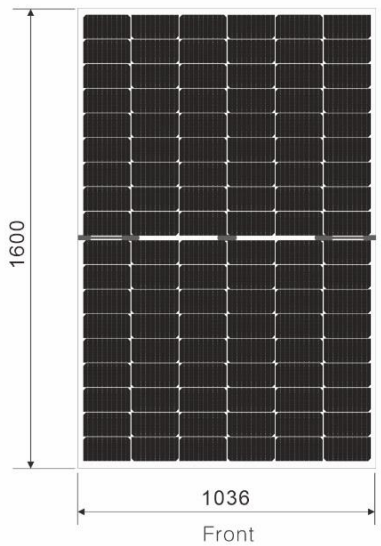

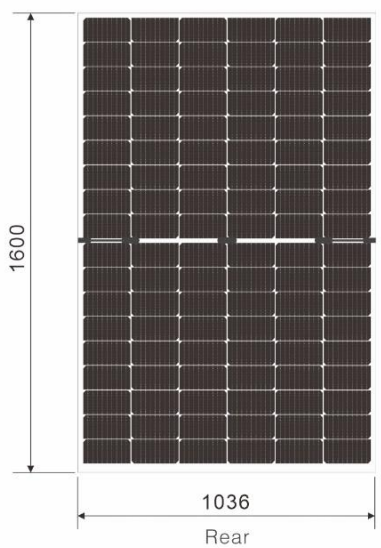

I-V curve(315W)

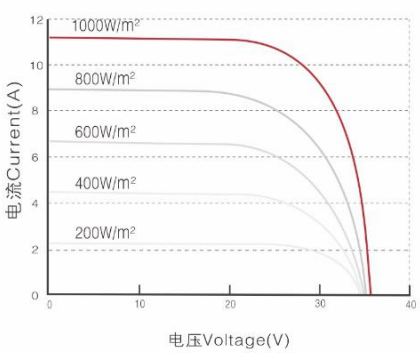

日新科技
RIXIN TECHNOLOGY

Xihe Smart PV Module

DDP315~DDP325

Main Features

Building materials design standards

Designed as per green building materials standards
30-Year power output

Half-cut technology, full black appearance

Simple full black design, excellent cell hidden technology

Intelligent safety guarantee

Module safety shutdown,power optimization and monitoring functions

Reduce shading loss

Half-cut cell + intelligent optimization technology
Avoid the influence of shading, reduce the loss of power

Easy Installation

The module design is easy for installation and could achieve a flat & full installation.

Product Certificates

ISO CE

Contact Us

Sales Hotline:
+86 27 87801237
info@rixinsolar.com

Rixin Technology PV Industrial Park, No.6, Middle Maodianshan Road, East Lake Development Zone, Wuhan, Hubei, China
www.rixinsolar.com

Xihe Smart PV Module

DDP315~DDP325

Launched for
intelligent & green buildings

Electrical performance parameters

Model	DDP315	DDP320	DDP325
Maximum power (Pm/Wp)	315	320	325
Maximum power voltage (Vmp/V)	29.3	29.4	29.5
Maximum power current (Imp/A)	10.75	10.88	11.00
Open circuit voltage (Voc/V)	35.9	36	36.1
Short circuit current (Isc/A)	11.54	11.60	11.66
Module efficiency (%)	19.0	19.3	19.6

Mechanical performance parameters

Cell Nos & array	Mono half-cut cells 108 (6*9*2)
Appearance color	Black
Cable	4mm², negative1000mm, positive1000mm
Module weight(kg)	19
Module dimension(L*W*H)(mm)	1600*1036*5mm
Packing	33pcs/pallet
Power optimizer matching form	2 modules equipped with 1 optimizer

Quality parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	20
NOCT(℃)	45 ± 2
Front/rear static loads(Pa)	2400/2400
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature coefficient (STC)

Temperature coefficient of Voc	-0.3%/℃
Temperature coefficient of Isc	+0.06%/℃
Temperature coefficient of Pm	-0.39%/℃

Test condition: irradiance=(1+0.1BiFi)1000W/m2, ambient temperature=25℃, AM=1.5

Quality warranty

10-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.
The parameters in this sheet are subject to change without prior notice.

Module dimension (mm)

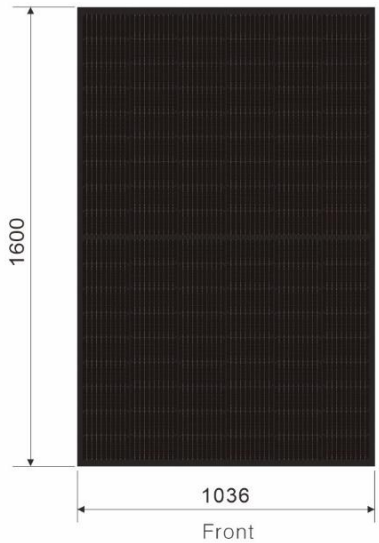

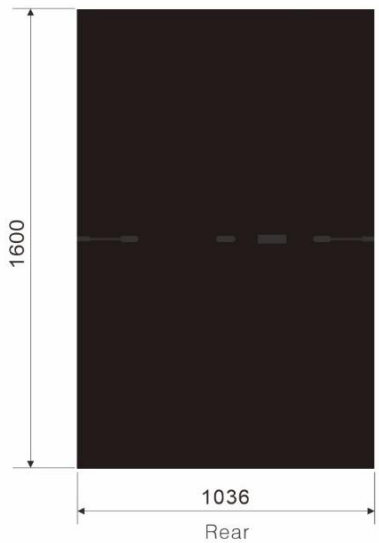

I-V curve(315W)

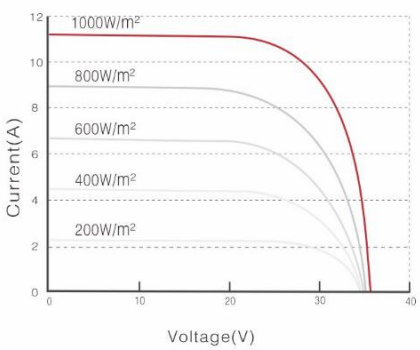

日新科技
RIXIN TECHNOLOGY

Xihe Smart PV Module

MDM280~290(K)

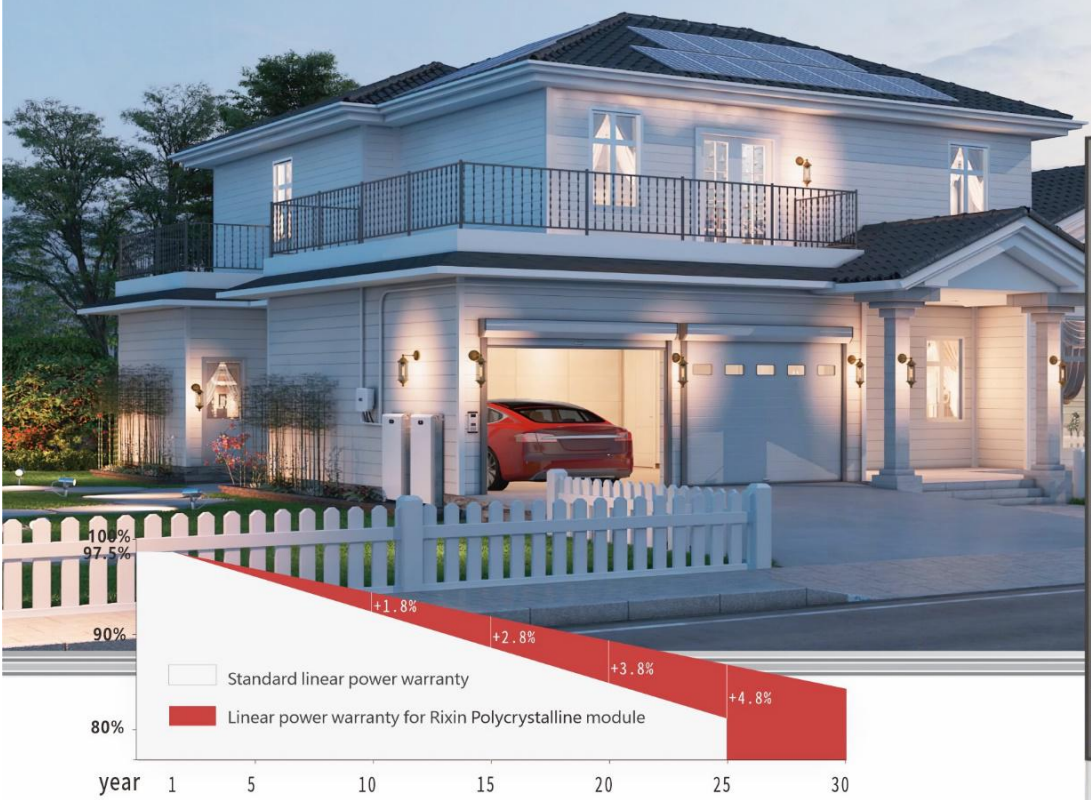

Main Features

Building materials design idea

Designed as per green building materials idea
30-Year power output

Half-cut technology

Increase power output, reduce cracking risks,
improve module reliability

Intelligent safety guarantee

Module safety shutdown,power optimization and
monitoring functions

Reduce shading loss

Half-cut cell + intelligent optimization technology
Avoid the influence of shading, reduce the loss of power

Easy Installation

The module design is easy for installation and could
achieve a flat & full installation.

Product Certificates

ISO CE

Contact Us

Sales Hotline:
+86 27 87801237
info@rixinsolar.com

Rixin Technology PV Industrial Park, No.6, Middle Maodianshan Road, East Lake Development Zone, Wuhan, Hubei, China
www.rixinsolar.com

Xihe Smart PV Module

MDM280~290(K)

Launched for
intelligent & green buildings

Electrical performance parameters

Model	MDM280(K)	MDM285(K)	MDM290(K)
Maximum power (Pm/Wp)	280	285	290
Maximum power voltage (Vmp/V)	31.5	31.7	31.9
Maximum power current (Imp/A)	8.9	9.00	9.10
Open circuit voltage (Voc/V)	37.5	37.6	37.7
Short circuit current (Isc/A)	9.70	9.80	9.90
Module efficiency (%)	16.6	16.9	17.2

Mechanical performance parameters

Cell Nos & array	Poly half-cut cells 120 (6*10*2)
Appearance color	dark blue
Cable	4mm², negative1200mm, positive1200mm
Module weight(kg)	20
Module dimension(L*W*H)(mm)	1690*998*30mm
Packing	30pcs/pallet
Power optimizer matching form	2 modules equipped with 1 optimizer

Quality parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	15
NOCT(℃)	45 ± 2
Front/rear static loads(Pa)	2400/3600
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature coefficient (STC)

Temperature coefficient of Voc	-0.31%/℃
Temperature coefficient of Isc	+0.05%/℃
Temperature coefficient of Pm	-0.41%/℃

Test condition: irradiance=(1+0.1BiFi)1000W/m2, ambient temperature=25℃, AM=1.5

Quality warranty

10-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.
The parameters in this sheet are subject to change without prior notice.

Module dimension (mm)

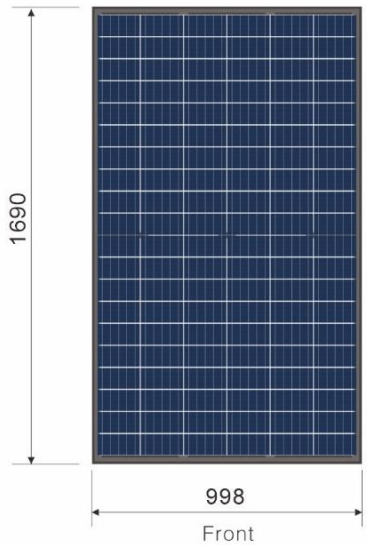

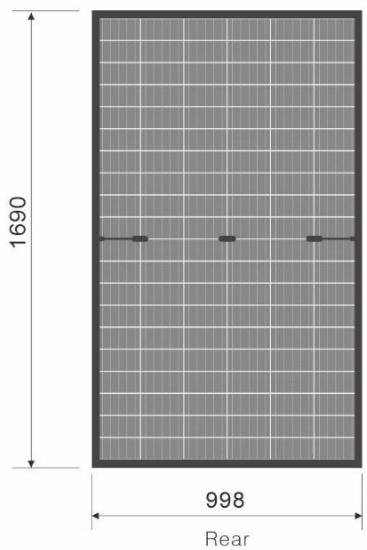

I-V curve (290W)

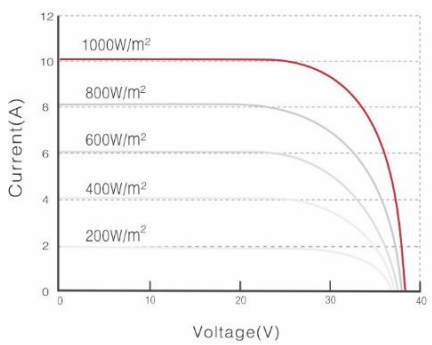

日新科技
RIXIN TECHNOLOGY

Xihe Smart PV Module

MDM280~MDM290

Main Features

Building materials design idea

Designed as per green building materials idea
30-Year power output

Half-cut technology

Increase power output, reduce cracking risks,
improve module reliability

Intelligent safety guarantee

Module safety shutdown,power optimization and
monitoring functions

Reduce shading loss

Half-cut cell + intelligent optimization technology
Avoid the influence of shading, reduce the loss of power

Easy Installation

The module design is easy for installation and could
achieve a flat & full installation.

Product Certificates

ISO CE

Contact Us

Sales Hotline:
+86 27 87801237
info@rixinsolar.com

Rixin Technology PV Industrial Park, No.6, Middle Maodianshan Road, East Lake Development Zone, Wuhan, Hubei, China
www.rixinsolar.com

Xihe Smart PV Module

MDM280~MDM290

Launched for
intelligent & green buildings

Electrical performance parameters

Model	MDM280	MDM285	MDM290
Maximum power (Pm/Wp)	280	285	290
Maximum power voltage (Vmp/V)	31.5	31.7	31.9
Maximum power current (Imp/A)	8.9	9.00	9.10
Open circuit voltage (Voc/V)	37.5	37.6	37.7
Short circuit current (Isc/A)	9.70	9.80	9.90
Module efficiency (%)	16.8	17.10	17.4

Mechanical performance parameters

Cell Nos & array	Poly half-cut cells 120 (6*10*2)
Appearance color	dark blue
Cable	4mm², negative1000mm, positive1000mm
Module weight(kg)	19
Module dimension(L*W*H)(mm)	1684*992*5mm
Packing	33pcs/pallet
Power optimizer matching form	2 modules equipped with 1 optimizer

Quality parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	15
NOCT(℃)	45 ± 2
Front/rear static loads(Pa)	2400/2400
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature coefficient (STC)

Temperature coefficient of Voc	-0.31%/℃
Temperature coefficient of Isc	+0.05%/℃
Temperature coefficient of Pm	-0.41%/℃

Test condition: irradiance=(1+0.1BiFi)1000W/m2, ambient temperature=25℃, AM=1.5

Quality warranty

10-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.
The parameters in this sheet are subject to change without prior notice.

Module dimension (mm)

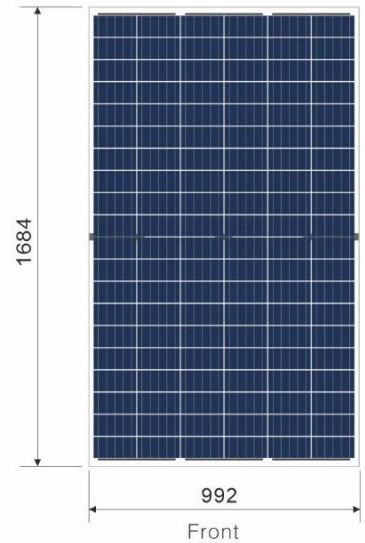

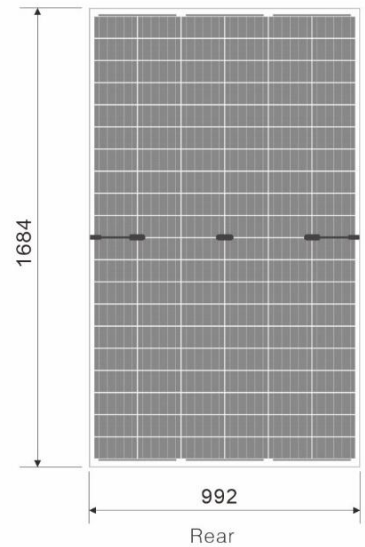

I-V curve (290W)

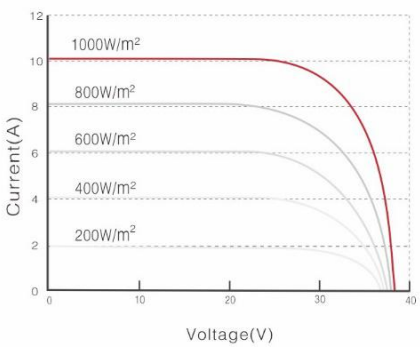

2.6MW Project in Hubei Ezhou Airport

Roof PV module in industrial park

3

BIPV Solar Module

RXZK-MDN210 RXJJ-MDN210

RXZK-MDM270 RXJJ-MDM270

RXZK-DDN250 RXJJ-DDN250

RXZK-DDM310 RXJJ-DDM310

Polycrystalline Hollow Glass Solar Module

RXZK-MDM270

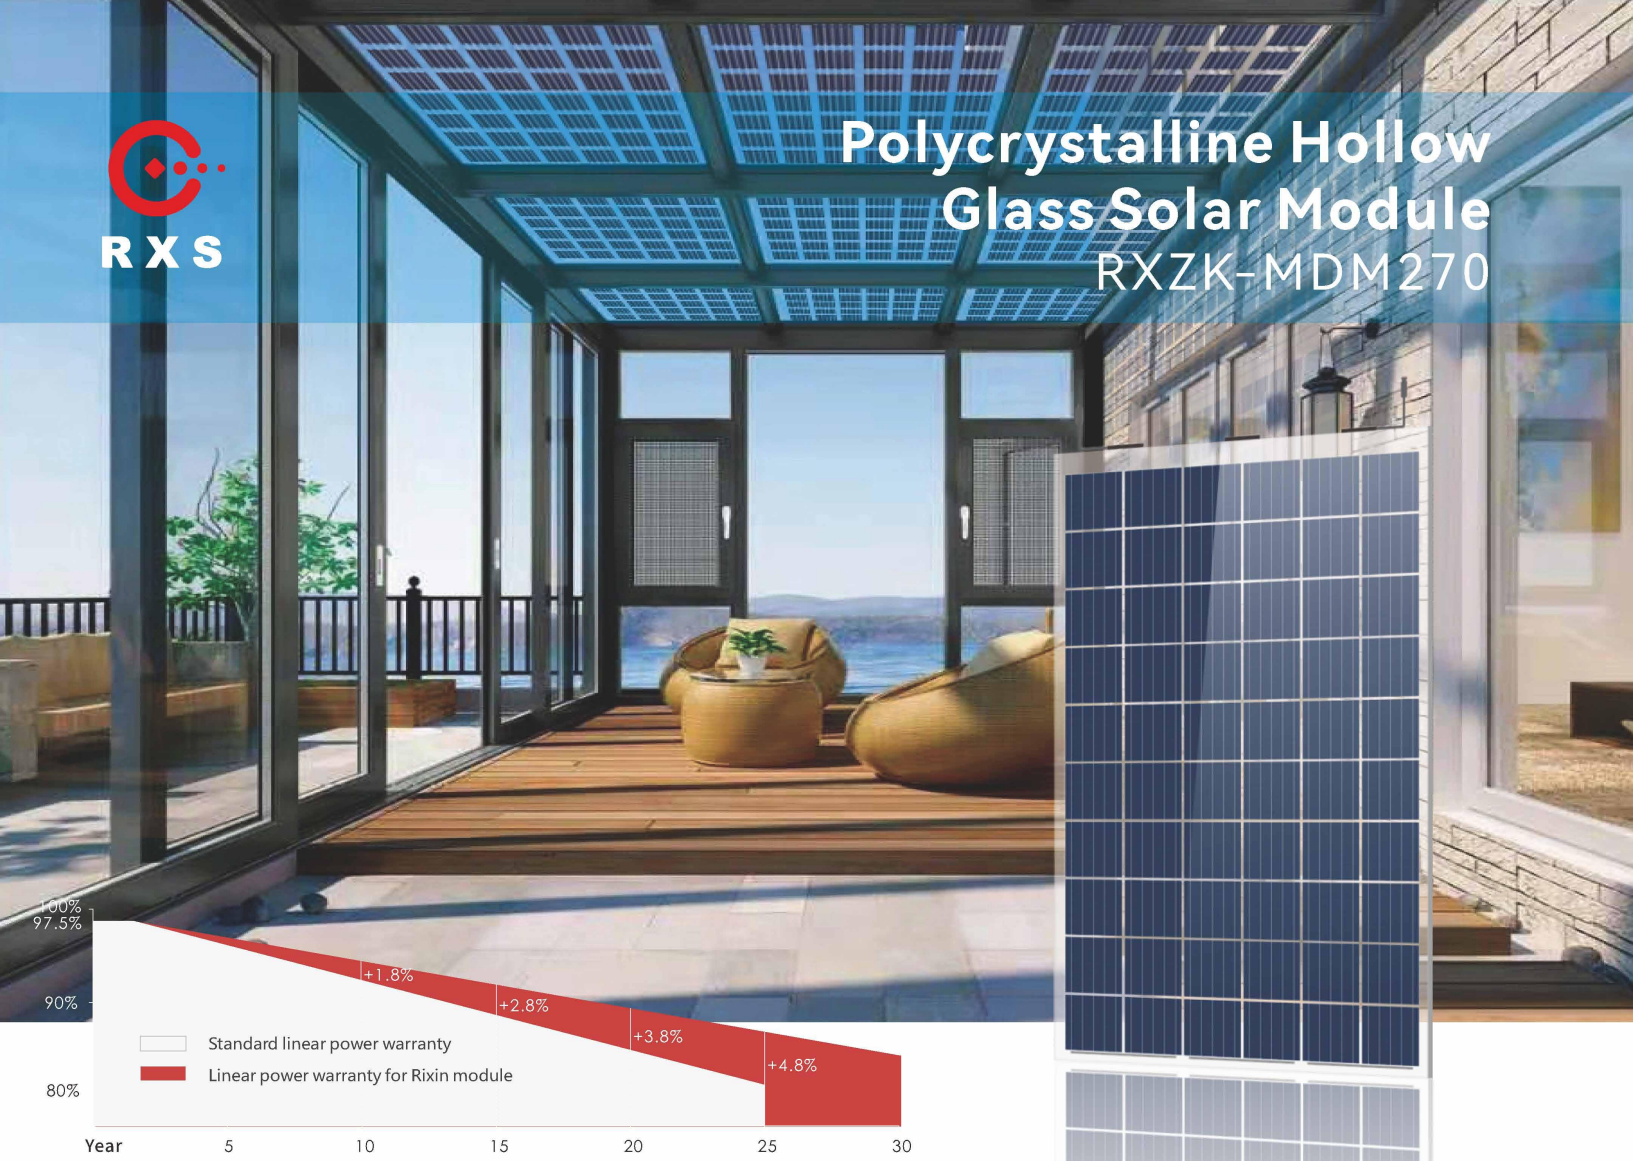

Main Features

Building Material Safety Standards

Design as per Green Building Material Standards

Safety

With high yield of impact resistance, wind pressure and snow pressure resistance 5400Pa.

Extra Power Generation

Over 30 years of power generation guarantee and as low as 0.5% power attenuation per year.

Sound Insulation & Heat Insulation

Wide range of applications.
Replacement of common glass materials such as sun rooms, skylights, carports, sound insulation panels and etc.

Easy Installation

Easy installation with modular design.
Easy to be fully flat deployed.

Certificates

Contact Us

Tel :+86 27 87801237
Email : info@rixinsolar.com

www.rixinsolar.com.cn

Polycrystalline Hollow Glass Solar Module
RXZK-MDM270

Electrical Performance Parameters

Model	RXZK-MDM270
Maximum power (Pm/Wp)	270
Maximum power voltage (Vmp/V)	31.84
Maximum power current (Imp/A)	8.48
Open circuit voltage (Voc/V)	38
Short circuit current (Isc/A)	9.35
Module efficiency (%)	14.4%

Mechanical Performance Parameters

Fault Structure	5Low iron tempered glass+0.76PVB +Polysilicon Cell +0.76PVB+5Toughened glass+9A+5Toughened glass
Cable	4mm²/900mm
Module weight(kg)	70
Module dimension(L*W*H)(mm)	1775*1060*26mm
Resistance to wind pressure	2.4kN/m²

Quality Parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	20
NOCT(℃)	45±2
Front/rear static loads(Pa)	5400/5400
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature Coefficient (STC)

Temperature coefficient of Voc	-0.31%/℃
Temperature coefficient of Isc	+0.05%/℃
Temperature coefficient of Pm	-0.41%/℃

Test condition: irradiance=(1+0.1BiFi)1000W/m2, ambient temperature=25℃, AM=1.5

Quality Warranty

10-year material & workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.

The parameters in this sheet are subject to change without prior notice.

Module Dimension (mm)

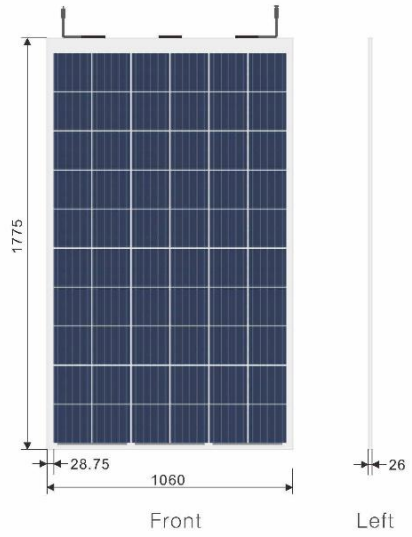

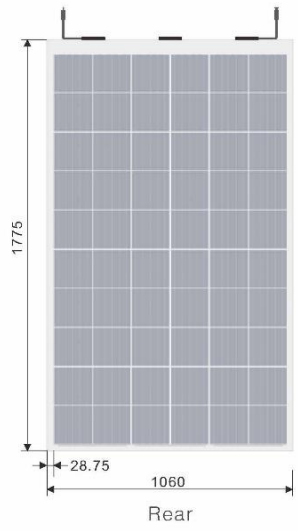

I-V Curve(270W)

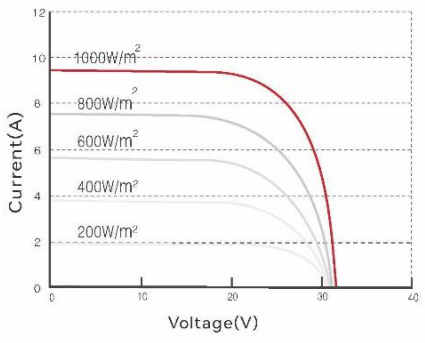

Monocrystalline Bifacial Hollow Glass Solar Module

RXZK-DDM310

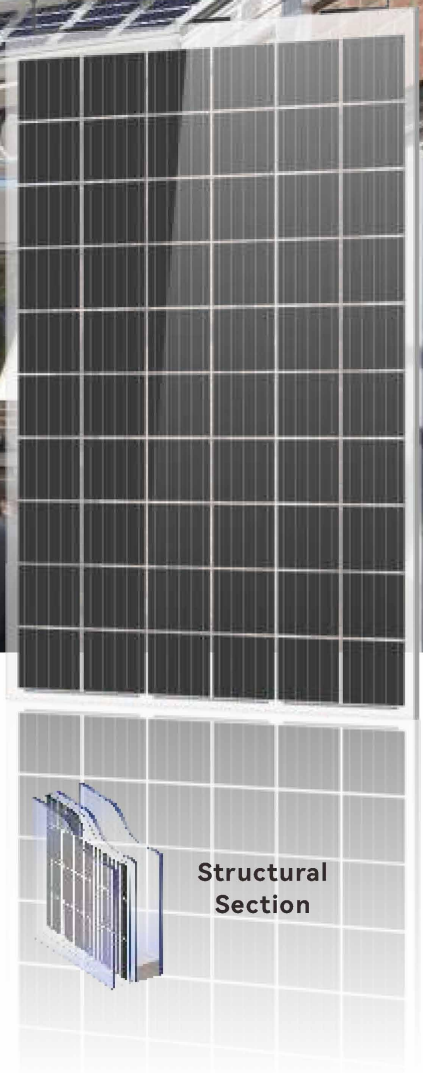

Main Features

Building Material Safety Standards

Design as per Green Building Material Standards.

Safety

With high yield of impact resistance, wind pressure and snow pressure resistance 5400Pa.

Extra Power Generation

Over 30 years of power generation guarantee and as low as 0.5% power attenuation per year.

Sound Insulation & Heat Insulation

Wide range of applications.
Replacement of common glass materials such as sun rooms, skylights, carports, sound insulation panels and etc.

Easy Installation

Easy installation with modular design.
Easy to be fully flat deployed.

Certificates

Contact Us

Tel :+86 27 87801237
Email : info@rixinsolar.com

www.rixinsolar.com.cn

Monocrystalline Bifacial Hollow Glass Solar Module

RXZK-DDM310

Electrical Performance Parameters

Model	RXZK-DDM310
Maximum power (Pm/Wp)	310
Maximum power voltage (Vmp/V)	32.1
Maximum power current (Imp/A)	9.65
Open circuit voltage (Voc/V)	38.2
Short circuit current (Isc/A)	10.4
Module efficiency (%)	16.5%

Mechanical Performance Parameters

Fault Structure	5Low iron tempered glass+0.76PVB +Polysilicon Cell +0.76PVB+5Toughened glass+9A+5Toughened glass
Cable	4mm²/900mm
Module weight(kg)	70
Module dimension(L*W*H)(mm)	1775*1060*26mm
Resistance to wind pressure	2.4kN/m²

Quality Parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	20
NOCT(℃)	45±2
Front/rear static loads(Pa)	5400/5400
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature Coefficient (STC)

Temperature coefficient of Voc	-0.30%/℃
Temperature coefficient of Isc	+0.048%/℃
Temperature coefficient of Pm	-0.38%/℃

Test condition: irradiance=(1+0.1BiFi)1000W/m2, ambient temperature=25℃, AM=1.5

Quality Warranty

10-year material & workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.

The parameters in this sheet are subject to change without prior notice.

Module Dimension (mm)

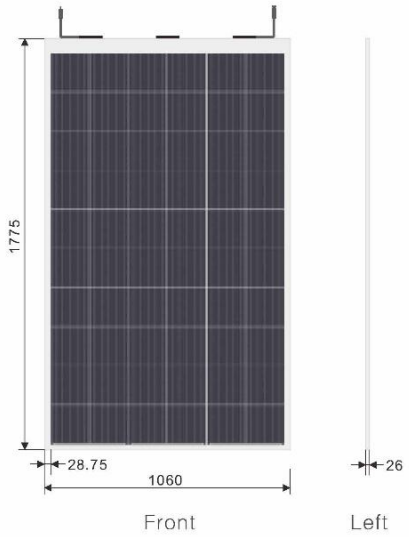

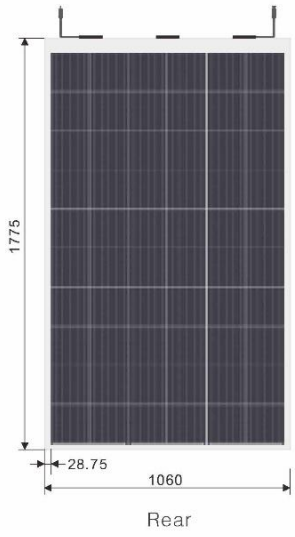

I-V Curve(310W)

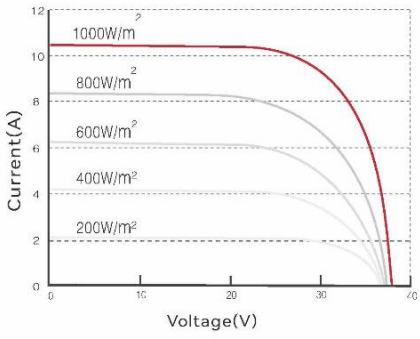

Polycrystalline Laminated Glass Solar Module
RXJJ-MDN210

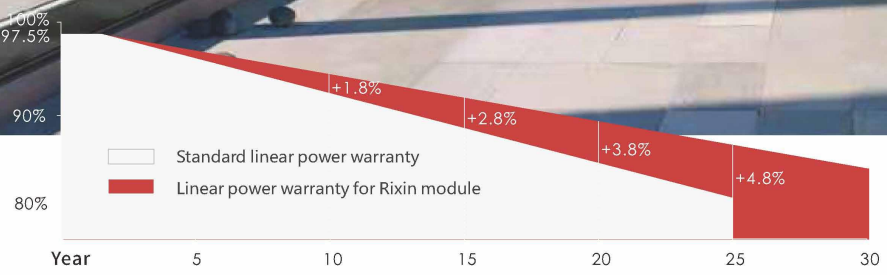

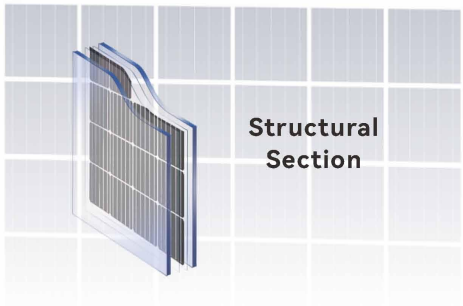

Main Features

Building Material Safety Standards
Design as per Green Building Material Standards.

Safety
With high yield of impact resistance, wind pressure and snow pressure resistance 5400Pa.

Extra Power Generation
Over 30 years of power generation guarantee and as low as 0.5% power attenuation per year.

Wide range of applications
Replacement of common glass materials such as sun rooms, skylights, carports and etc.

Easy Installation
Easy installation with modular design.
Easy to be fully flat deployed.

Certificates

Contact Us

Tel :+86 27 87801237
Email : info@rixinsolar.com

www.rixinsolar.com.cn

Polycrystalline Laminated Glass Solar Module

RXJJ-MDN210

Electrical Performance Parameters

Model	RXJJ-MDN210
Maximum power (Pm/Wp)	210
Maximum power voltage (Vmp/V)	24.78
Maximum power current (Imp/A)	8.48
Open circuit voltage (Voc/V)	30
Short circuit current (Isc/A)	9.35
Module efficiency (%)	13.6%

Mechanical Performance Parameters

Fault Structure	5 Low iron tempered glass + 0.76PVB + Polysilicon Cell + 0.76PVB + 5 tempered glass (3.2+3.2 glass can also be choosed to reduce the thickness and weight)
Cable	4mm²/900mm
Module weight(kg)	40
Module dimension(L*W*H)(mm)	1460*1060*11mm
Resistance to wind pressure	2.4kN/m²

Quality Parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	20
NOCT(℃)	45±2
Front/rear static loads(Pa)	5400/5400
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature Coefficient (STC)

Temperature coefficient of Voc	-0.31%/℃
Temperature coefficient of Isc	+0.05%/℃
Temperature coefficient of Pm	-0.41%/℃

Quality Warranty

10-year material & workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.

The parameters in this sheet are subject to change without prior notice.

Module Dimension (mm)

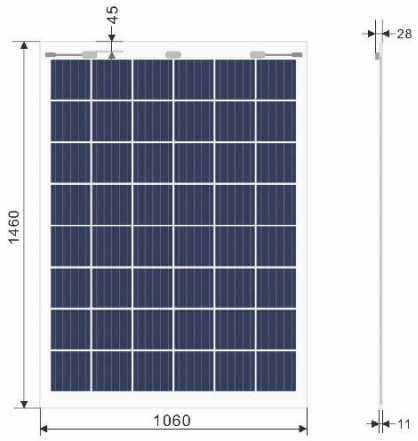

Front Left

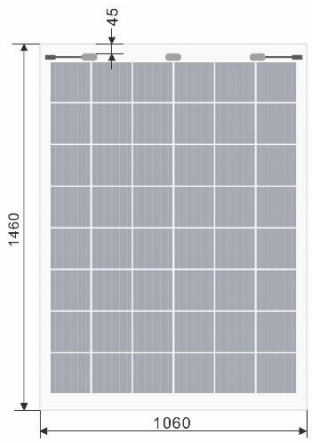

Rear

I-V Curve(210W)

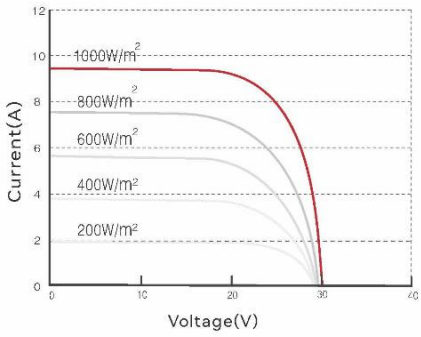

Monocrystalline Laminated Glass Solar Module

RXJJ-DDN250

Main Features

Building Material Safety Standards

Design as per Green Building Material Standards.

Safety

With high yield of impact resistance, wind pressure and snow pressure resistance 5400Pa.

Extra Power Generation

Over 30 years of power generation guarantee and as low as 0.5% power attenuation per year.

Sound Insulation & Heat Insulation

Wide range of applications.
Replacement of common glass materials such as sun rooms, skylights, carports, sound insulation panels and etc.

Easy Installation

Easy installation with modular design.
Easy to be fully flat deployed.

Certificates

Contact Us

Tel :+86 27 87801237
Email : info@rixinsolar.com

www.rixinsolar.com.cn

Monocrystalline Laminated Glass Solar Module

RXJJ-DDN250

Electrical Performance Parameters

Model	RXJJ-DDN250
Maximum power (Pm/Wp)	250
Maximum power voltage (Vmp/V)	25.9
Maximum power current (Imp/A)	9.65
Open circuit voltage (Voc/V)	32.4
Short circuit current (Isc/A)	10.15
Module efficiency (%)	16.2%

Mechanical Performance Parameters

Fault Structure	5 Low iron tempered glass + 0.76PVB + Mono Bifacial cell + 0.76PVB + 5 tempered glass (3.2+3.2 glass can also be choosed to reduce the thickness and weight)
Cable	4mm²/900mm
Module weight(kg)	40
Module dimension(L*W*H)(mm)	1460*1060*11mm
Resistance to wind pressure	2.4kN/m²

Quality Parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	20
NOCT(℃)	45±2
Front/rear static loads(Pa)	5400/5400
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature Coefficient (STC)

Temperature coefficient of Voc	-0.30%/℃
Temperature coefficient of Isc	+0.048%/℃
Temperature coefficient of Pm	-0.38%/℃

Quality Warranty

10-year material & workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.

The parameters in this sheet are subject to change without prior notice.

Module Dimension (mm)

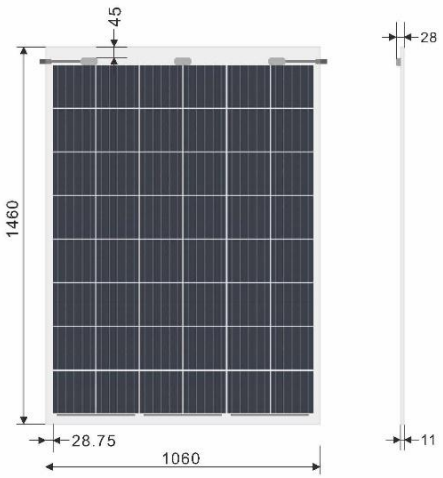

Front Left

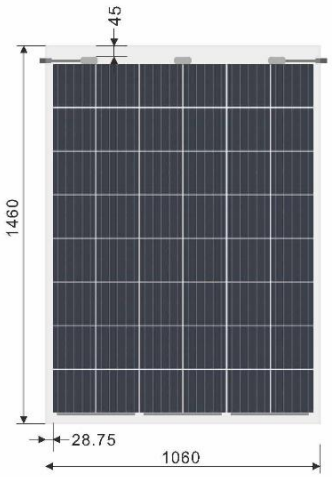

Rear

I-V Curve(250W)

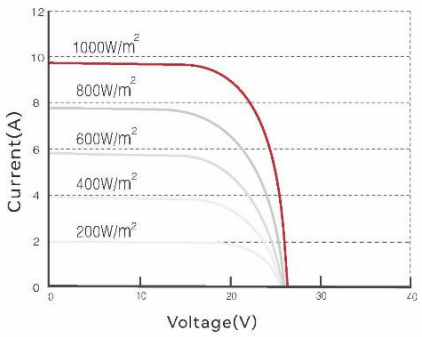

Polycrystalline Laminated Glass Solar Module
RXJJ-MDM270

Main Features

Building Material Safety Standards
Design as per Green Building Material Standards.

Safety
With high yield of impact resistance, wind pressure and snow pressure resistance 5400Pa.

Extra Power Generation
Over 30 years of power generation guarantee and as low as 0.5% power attenuation per year.

Wide range of applications
Replacement of common glass materials such as sun rooms, skylights, carports and etc.

Easy Installation
Easy installation with modular design.
Easy to be fully flat deployed.

Certificates

Contact Us

Tel :+86 27 87801237
Email : info@rixinsolar.com

www.rixinsolar.com.cn

Polycrystalline Laminated Glass Solar Module

RXJJ-MDM270

Electrical Performance Parameters

Model	RXJJ-MDM270
Maximum power (Pm/Wp)	270
Maximum power voltage (Vmp/V)	31.84
Maximum power current (Imp/A)	8.48
Open circuit voltage (Voc/V)	38
Short circuit current (Isc/A)	9.35
Module efficiency (%)	14.4%

Mechanical Performance Parameters

Fault Structure	5 Low iron tempered glass + 0.76PVB + Polysilicon Cell + 0.76PVB + 5 tempered glass (3.2+3.2 glass can also be choosed to reduce the thickness and weight)
Cable	4mm²/900mm
Module weight(kg)	56
Module dimension(L*W*H)(mm)	1775*1060*11mm
Resistance to wind pressure	2.4kN/m²

Quality Parameters

Module working temperature range (℃)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	20
NOCT(℃)	45±2
Front/rear static loads(Pa)	5400/5400
Protection grade of junction box	Ip68, split/MC4 compatible

Temperature Coefficient (STC)

Temperature coefficient of Voc	-0.31%/℃
Temperature coefficient of Isc	+0.05%/℃
Temperature coefficient of Pm	-0.41%/℃

Quality Warranty

10-year material & workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.

The parameters in this sheet are subject to change without prior notice.

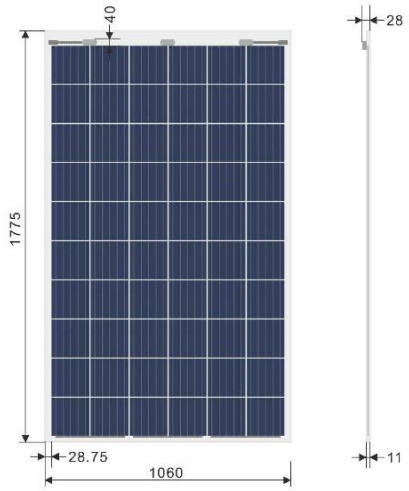

Front Left

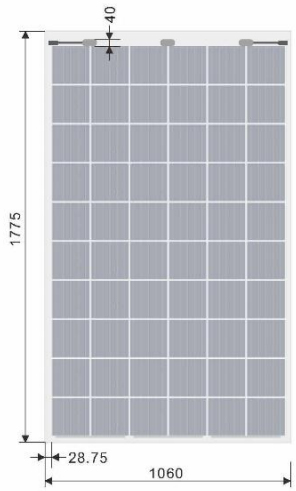

Rear

I-V Curve(270W)

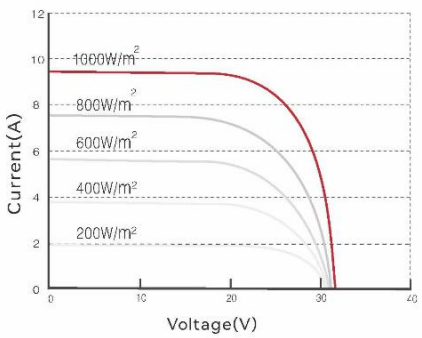

武汉未来科技城

武汉国际博览中心

海南盈溪谷BIPV光伏廊架

宜昌东站BIPV光伏采光顶

德国BIPV光伏阳光棚

宜昌BIPV光伏幕墙

武汉花山生态艺术中心光伏百叶

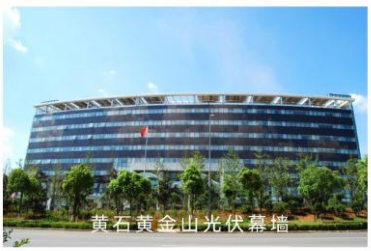
黄石黄金山光伏幕墙

The Customer Hotline

Tel : 027-87801237

Website : www.rixinsolar.com.cn

Email : chengying@rixinsolar.com

Wuhan Rixin Technology Co.,Ltd

Add: Rixin Technology PV Industrial Park, No.6, Middle Maodianshan Road,
East Lake Development Zone, Wuhan, China